



### Feature :

- Stable
- Long electrical life cycles


### Application :

- Telephone
- Fax machine




SWITCH SPECIFICATIONS	
POLE - POSITION	2P2T , Momentary Type
CONTACT RATING	30 V DC , 0.1 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA ; by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	100 gf MAX.
OPERATING LIFE	300,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C

### ▶ HOW TO ORDER




### ▶ DIMENSION

HS001 - P2NAAA

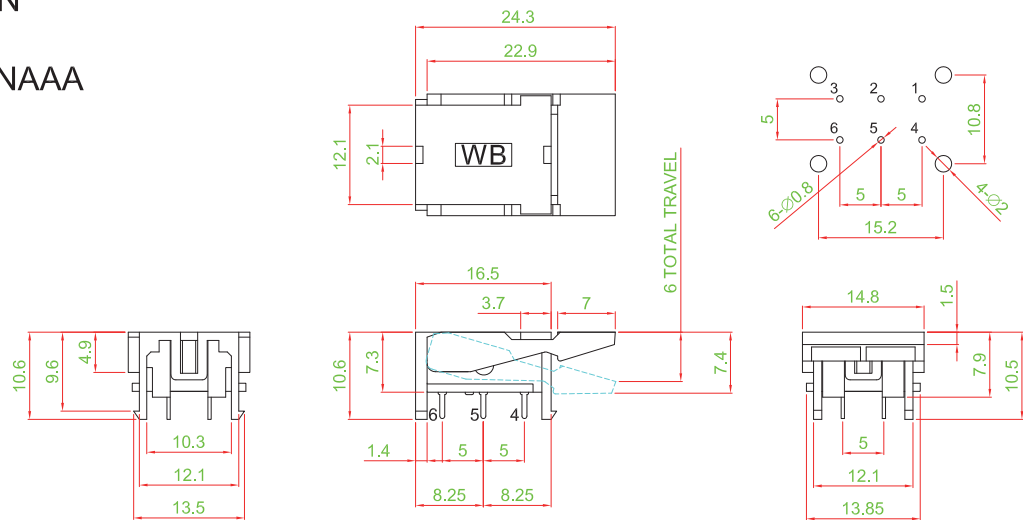

### ▶ CIRCUIT



### ▶ SWITCH SEQUENCE

