




- TACT SWITCH
- PUSH BUTTON SWITCH
- LED TOUCH SENSOR SWITCH
- 5 DIRECTION NAVIGATION SWITCH WITH LED
- MEMBRANE SWITCH
- LED LIGHT BAR
- SLIDE SWITCH
- ROTARY SWITCH
- ROCKER SWITCH
- DETECT SWITCH
- ENCODER
- INTERRUPTER
- MINIATURE MICRO SWITCH
- TELEPHONE HOOK SWITCH
- DOOR SWITCH
- MINI SIZE SOCKET
- KNOB
- CAP SYMBOL

Feature :

- Compact size 0.9 mm height
- Good double action
- Tactile feeling


Application :

- Shutter of still cameras
- And video cameras





SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , 1P2T
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	1*st 80 ± 40 gf ; 2*nd 250 ± 60 gf
OPERATING LIFE	30,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1*st 0.25 ± 0.1 mm ; 2*nd 0.4 ± 0.15 mm

▶ HOW TO ORDER


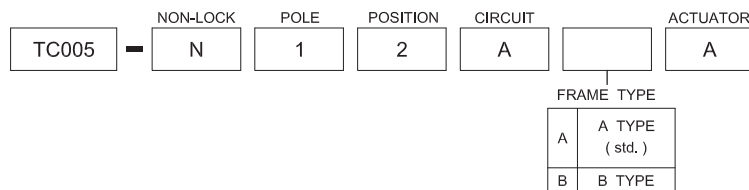


▶ DIMENSION

TC005-N12AAA

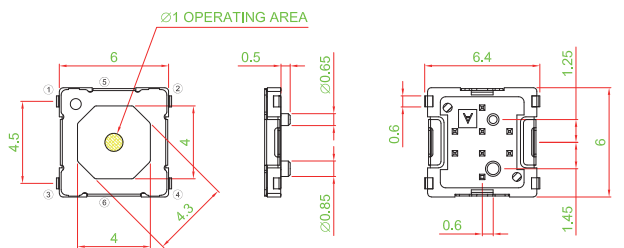

TC005-N12ABA

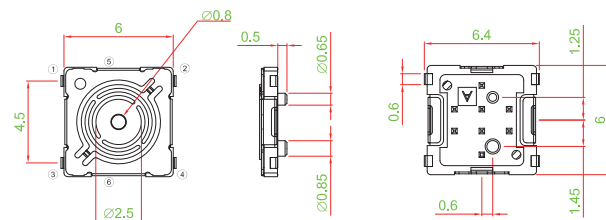

▶ CIRCUIT

